

Digital output module

Short guide

1. Overview

Digital output module MU110-24.32R is an extension module with 32 digital outputs.

The module provides the following functions:

- connection of actuators with digital outputs
- output control using ModBus network
- pulse width modulation
- network diagnostic
- fault and alarm signals
- Slave in a ModBus protocol structure.



CAUTION

This device should not be used for medical devices which receive, control or otherwise affect human life or physical health.

2. Environmental conditions

Table 1 Environmental conditions

Condition	Permissible range
Ambient temperature	-20 ... +55 °C
Transportation and storage	-25 ... +55 °C
Relative humidity	up to 80% (at +25 °C, non-condensing)
Altitude	up to 2000 m above sea level



CAUTION

The following environmental conditions must be observed:

- low-dust, dry and controlled environment
- closed explosion-proof rooms without aggressive vapors and gases

3. Specification

Table 2 Specification

Characteristic	Value
Power supply	
Power supply	24 (20 ... 28) V DC
Power consumption, max.	20 W
Outputs	
Number of outputs	32
Type	Relays (NO)
Control	On-Off or PWM
Maximum voltage on relay contacts	264 V AC or 30 V DC
Switching capacity	3 A, 250 V AC, $\cos\phi > 0.4$ or 3 A, 30 V DC
Switching current, min.	100 mA
Service lifetime, mechanical	10,000,000 switches

Characteristic	Value
Service lifetime, electric (NO contact)	6 A, 30 V DC 6 A, 250 V AC
Switching time	15 ms
PWM frequency, max.	1 Hz with 0.05 duty cycle
PWM pulse length, min.	50 ms
Interfaces	
Data transfer interface	RS-485
Baud rate, max.	115.2 kBd
Protocols	akYtec, ModBus-RTU/ ASCII
Galvanic isolation	2300 V
Flash memory overwrites, max.*	10,000
General specification	
Dimensions	(63 × 110 × 75) ± 1 mm
IP code:	IP20
Faceplate	IP00
Terminal block	IP00
Average service lifetime	10 years
Weight, max.	800 g

* Flash memory stores configuration parameters.

4. Settings

The module can be configured with the akYtecToolPro software using a RS485-USB interface adapter (not included).



NOTE

The latest version of the configuration software is available for download on www.akytec.de.

Full list of the parameters is given in *User guide* (available on the device page at www.akytec.de).

5. Installation and connection

Before installation make sure there is enough free space for connecting the module and placing the wires.

The module is designed for DIN rail mounting in a control cabinet or for wall mounting.



CAUTION

Improper installation can cause serious or minor injuries and damage the module.
Installation must be performed only by fully qualified personnel.

Installation of external connections is carried out by a wire with a cross section of not more than 0.75 mm².

Powering any devices from the network contacts of the module is prohibited

The device is powered from a local power supply unit of suitable capacity.

The power supply unit should be installed in the same electrical cabinet in which the device is installed.



CAUTION

All electrical connections must be performed by a fully qualified electrician.
Switch on the power supply only after the wiring of the device has been completely performed.

6. Wiring

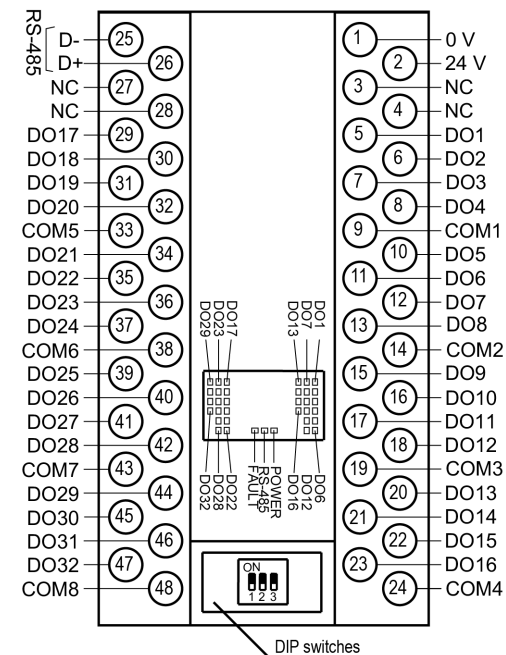


Fig. 1 Terminal block layout

Table 3 Terminal block assignment

No.	Description	No.	Description
1	Power supply (0V)	25	RS-485 (S-D-)
2	Power supply (24 V)	26	RS-485 (D+)
3	Not connected	27	Not connected
4	Not connected	28	Not connected
5	Output 1	29	Output 17
6	Output 2	30	Output 18
7	Output 3	31	Output 19
8	Output 4	32	Output 20
9	Common terminal for DO 1–4	33	Common terminal for DO 17–20
10	Output 5	34	Output 21
11	Output 6	35	Output 22
12	Output 7	36	Output 23
13	Output 8	37	Output 24

No.	Description	N-o.	Description
14	Common terminal for DO 5–8	38	Common terminal for DO 21–24
15	Output 9	39	Output 25
16	Output 10	40	Output 26
17	Output 11	41	Output 27
18	Output 12	42	Output 28
19	Common terminal for DO 9–12	43	Common terminal for DO 25–28
20	Output 13	44	Output 29
21	Output 14	45	Output 30
22	Output 15	46	Output 31
23	Output 16	47	Output 32
24	Common terminal for DO 13–16	48	Common terminal for DO 29–32

Purpose of switches:

- **1** – restore factory network settings. The factory switch position is OFF (factory network settings are disabled);
- **2** – service function, the switch must be in the **OFF** position;
- **3** – hardware write protection of the device's non-volatile memory. The factory setting of the switch is **OFF** (hardware protection is disabled).

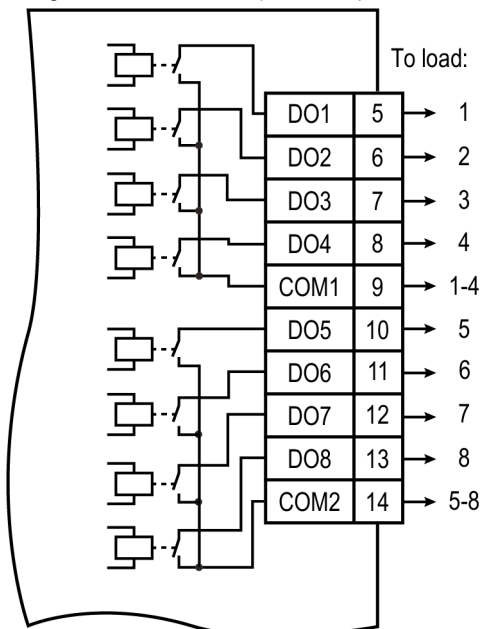


Fig. 2 Output wiring

Table 4 Common terminals

Output group	Common terminal
DO1–DO4	COM1
DO5–DO8	COM2
DO9–DO12	COM3
DO13–DO16	COM4
DO17–DO20	COM5
DO21–DO24	COM6
DO25–DO28	COM7
DO29–DO32	COM8

7. Indication

On the front panel there are indication LEDs.

Table 5 Indication

LED	LED state	Description
OUTPUT 1...32	ON	Output is on
RS-485	Flashing	Data exchange via serial port
POWER	ON	Power on
FAULT	ON	Data exchange via serial port is interrupted

8. Modbus registers

Writing to the registers is performed with function 16 (0x10), reading — with functions 03 or 04 (the device supports both functions).

Table 6 Modbus registers

Parameter	Value (Unit)	Type	Register	
			(Hex)	(Dec)
Duty cycle DO1–DO32	0...1000 (0,1 %)	Uint16	0000–001F	0000–0031
Safe output status DO1–DO32	0...1000 (0,1 %)	Uint16	0020–003F	0032–0063
PWM period DO1–DO32	1...900 c	Uint16	0040–005F	0064–0095
Bit mask of output status	0...4294967295	Uint32	0061, 0062	0097, 0098
Baud rate	0 – 2,4 (kbit/s); 1 – 4,8 (kbit/s); 2 – 9,6 (kbit/s); 3 – 14,4 (kbit/s); 4 – 19,2 (kbit/s); 5 – 28,8 (kbit/s); 6 – 38,4 (kbit/s); 7 – 57,6 (kbit/s); 8 – 115,2 (kbit/s)	Uint16	0209	0521
Data bits	0 – 7 1 – 8	Uint16	020A	0522
Stop bits	0 – 1 stop bit 1 – 2 stop bits	Uint16	020B	0523

Parameter	Value (Unit)	Type	Register	
			(Hex)	(Dec)
Parity	0 – none 1 – even 2 – odd	Uint16	020C	0524
Response time-out	0...45 (ms)	Uint16	020D	0525
Device address	1...255	Uint16	020F	0527
Network address length	0 – 7 1 – 8	Uint16	0211	0529
Time-out	0...600 s	Uint16	0030	0048
Device name	—	String	F000	61440
Device version	—	String	F010	61456